



ZeroTouch[®]

ZTS-5050


NON-CONTACT 3D SURFACE PROFILING SENSOR

A high-speed, precision surface profiling inspection sensor for shop floor installation.

The ZeroTouch[®] 5000 Series non-contact surface profiling sensor generates a precise 3D point cloud of surface micro-geometrie and micro-structures down to single atom layers.



Sinus-wavelength with Reduction of the Height Amplitude to 50%

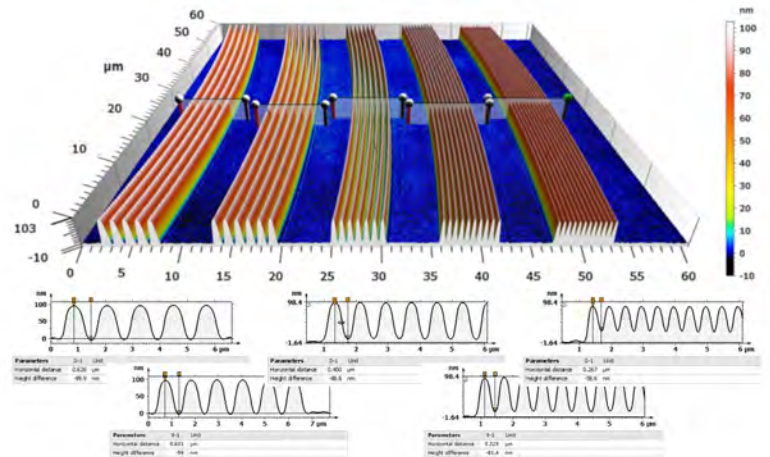

KEY BENEFITS

- Non-contact measurements of smooth, rough, and specular surfaces such as glass, metal, plastic, and composite
- Precise measurement of height and relevant surface parameters
- Installed in the immediate vicinity of the production line
- Inspects mirrors, semiconductor wafers, microlenses, and solar cells
- Micron-level fast measurements of various surface profiles
- 3D sensor with manually interchangeable objective

KEY FEATURES

- White-light interferometry based, very high resolution sensors (5 MP)
- Piezo positioning system with interferometric calibrated closed-loop controller (up to 100 μ m scan range)
- Optional XY positioning table with manual Z adjustment
- Advanced algorithms improve speed and reduce system noise





ZeroTouch[®]

ZTS-5050

NON-CONTACT 3D SURFACE PROFILING SENSOR


SPECIFICATIONS

HIGH-RESOLUTION CAMERA	5 MP
Measuring Points	2456 x 2054
Scanning Speed Full Resolution	77 Hz
Scanning Speed ROI	Up to 2 kHz
Topography Reproducibility	<0.03nm
Scanning Speed	5.2µm/s
SYSTEM PERFORMANCE	
1-σ Reproducibility 0.4µm Step Height	<1nm
1-σ Reproducibility 12µm Step Height	<3nm
SCANNING	
Scan Range	Up to 100µm
Max Scanning Speed	~200µm/s
Digitization	Up to 0.01pm
SOFTWARE	
OS	Windows 10
Analysis Software	MountainsMap

MACHINE SIZE	
Sensor Weight	~2 kg (4.4 lbs)
Coarse Positioning Range (max.) (manual Z positioning)	70 mm
Fine Positioning Range (manual Z positioning)	1.9 mm
Tilting Angle (leveling device)	±3°
POSITIONING TABLES	
Positioning Area	100 x 100 mm ²
Positioning Options	Manual or Automatic
Load Capacity	2 kg
Resolution	0.01µm
Orthogonality	<10arcsec
Vibration Isolation	Options available
ENVIRONMENTAL	
Temperature (Operational)	10°C (50°F) to 35°C (95°F)
Relative Humidity (Non-Condensing)	Up to 80%
ELECTRICAL SUPPLY	
Electrical Service	100 to 240 VAC, 50/60Hz



KEY INDUSTRIES

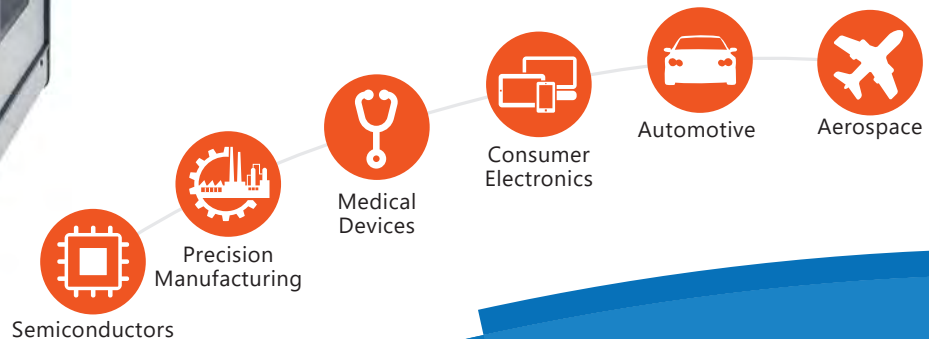

DWFRITZ[®]
M E T R O L O G Y

9600 SW Boeckman Road, Wilsonville, OR 97070
Toll Free: 800-763-4161
Tel: +1-503-598-9393
Fax: +1-503-624-2799
Email: info@dwfritz.com
<https://www.dwfritz.com>

DWFritz Metrology is a global provider of high-speed, non-contact metrology and inspection platforms for advanced manufacturing. The company designs, builds, and supports engineer-to-order automation systems, as well as provides world-class build-to-print manufacturing capabilities.